

PHOTOELECTRIC BEAM SENSOR



PR10B : Indoor 10m (33')

PR10BU : Indoor 10m (33') Flush Mount



PR-10BU
(Flush mount)

The popular PR-10B reflector beam is now available in a white enclosure for a more unobtrusive installation. It is designed for applications where a "beam break" sensor is desirable but running wire to both ends is impractical. Suggested applications include entrances and exits, corridors, specific area and as an annunciation device.

ROTARY OPTICAL SYSTEM

Beam direction can be rotated a full 180° for installation adaptation.

EASY MAINTENANCE

Operation LED(red) and SA(Self-Adjustment) mechanism yield quick operation check and ensure good beam alignment. [Utility model registered]

HIGH SENSITIVITY TO REFLECTED BEAM

Receiver incorporates a differential calculus detection system which precisely "locks on" to the incoming reflected beam. [Utility model registered]

EASY INSTALLATION

Wire is run to the transmitter only. The reflector allows up to a 40° (±20°) angle variance in beam reception / reflection which makes installation very "forgiving" and can aid in situations where it is nearly impossible for the beam to reflect off the mirror "dead center".

OTHERS

- * Alien-light rejection circuit
- * "L" bracket available for reflector (option)


FLUSH MOUNT TYPE AVAILABLE (PR-10BU)

Inconspicuous flush mount PR-10BU is available.


Note: Use of the flush mount type unit eliminates the ability to rotate the optics.

PHOTOELECTRIC BEAM SENSOR


COVERAGE

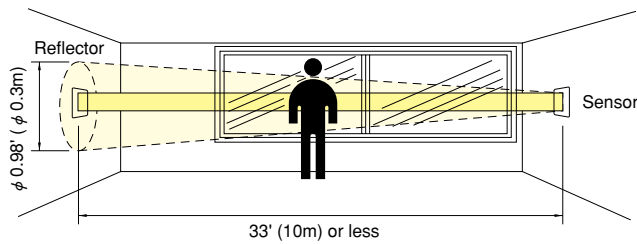

EXTERNAL DIMENSIONS (Unit : inch (mm))

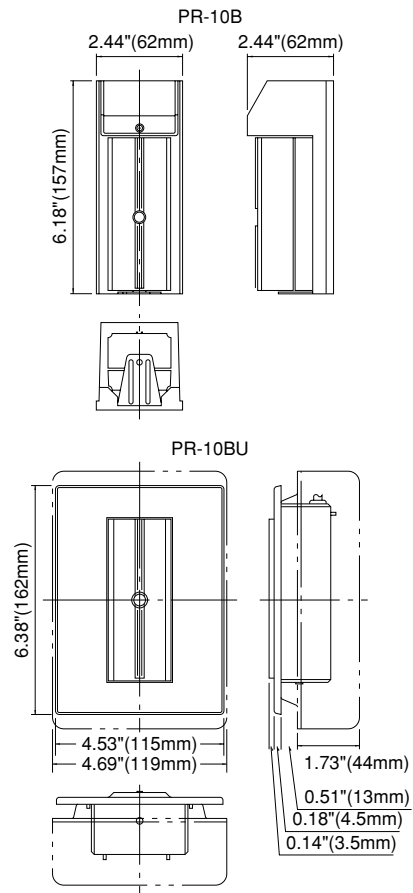


TERMINAL ARRANGEMENT

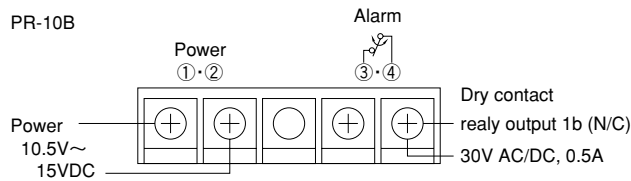

WIRING

PR-10BU

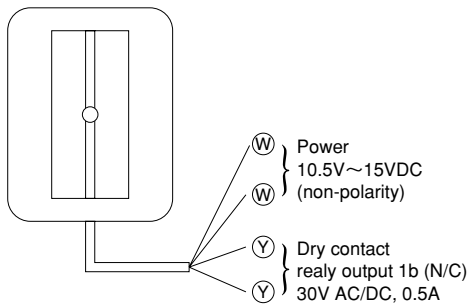

OPTIONAL



L fittings
BL-10 (stainless)

(for reflector)

SPECIFICATIONS

Product name	Photoelectric beam sensor	
Model	PR-10B	PR-10BU
Protection distance	33' (10m)	
Infrared beam	RED Wave length: 9400Å, Modulation: 500Hz	
Response time	50-100 msec. or more	
Alarm signal	Dry contact relay output 1b (N/C) Contact capacity: 30V (AC/DC), 0.5A	
Supply voltage	10.5VDC to 15VDC (non-polarity)	
Power consumption	30mA (at 12VDC)	
Ambient temperature range	-13°F to +131°F (-25°C to +55°C)	
Mounting position	Indoor (entrance, corridor)	
Wiring	Terminal	Lead wire
Weight	7.7 oz (220g)	16.8 oz (480g)
Appearance	ABS resin (white)	Duralumin plate

Please Note : This sensor is designed to detect intrusion and to initiate an alarm; it is not a burglary or a crime preventing device. TAKEX is not responsible for damage, injury or losses caused by accident, theft, Acts of God (including inductive surge by lighting), abuse, misuse, abnormal usage, faulty installation or improper maintenance.

TAKEX

RX GROUP

INTELIGENTNE SYSTEMY ZABEZPIECZENIA

In Japan

Takenaka Engineering Co., Ltd.
83-1, Gojo-sotokan,
Higashino, Yamashina-ku,
Kyoto 607-8156, Japan
Tel : 81-75-501-6651
Fax : 81-75-593-3816
<http://www.takex-eng.co.jp>

In the U.S.

Takex America Inc.
3350, Montgomery Drive,
Santa Clara,
CA 95054, U.S.A.
Tel : 408-747-0100
Fax : 408-734-1100
<http://www.takex.com>

In Australia

Takex America Inc.
Unit 16/35 Garden Road,
Clayton 3168 Victoria,
Australia
Tel : 03-9546-0533
Fax : 03-9547-9450

Takex America Inc.
Brisbane office : 1/50 Logan
Road, Woolloongabba
Queensland
4102, Australia
Tel : 07-3891-3344
Fax : 07-3891-3355

In the U.K.

Takex Europe Ltd.
Takex House, Aviary Court,
Wade Road, Basingstoke,
Hampshire, RG24 8PE, U.K.
Tel : (+44) 01256-475555
Fax : (+44) 01256-466268
<http://www.takexeurope.com>